

A1500 T B X - 2 X - C

代码+间距
T示意端子
X普通
L长
S短
X公
G母
C示意90°
S示意180°

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

X普通脚
H高脚
P磷铜
B黄铜
E合金铜

PRODUCT SPECIFICATON

1. SURFACE TREATEMENT: Tin plated brass terminal
2. Temperature range: -25°C ~ 85°C
3. Current rating: 0.7A AC/DC
4. Contact resistance: 20mΩ MAX
5. Insulation resistance: 1000MΩ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: 24~30#

东莞市平达电子科技有限公司

料号PART NO: A1500TBX-2X-C

品名 TITLE: SZN1.5-T(90°)

材料: C2680

单位: MM

包装规格:

比例: 1:1

制图:



审核:

核准:


日期: 2020.6.5

一般公差
GENERAL TOLERANCE
X.X ±0.15
X.XX ±0.10
ANGLE ±1°


日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

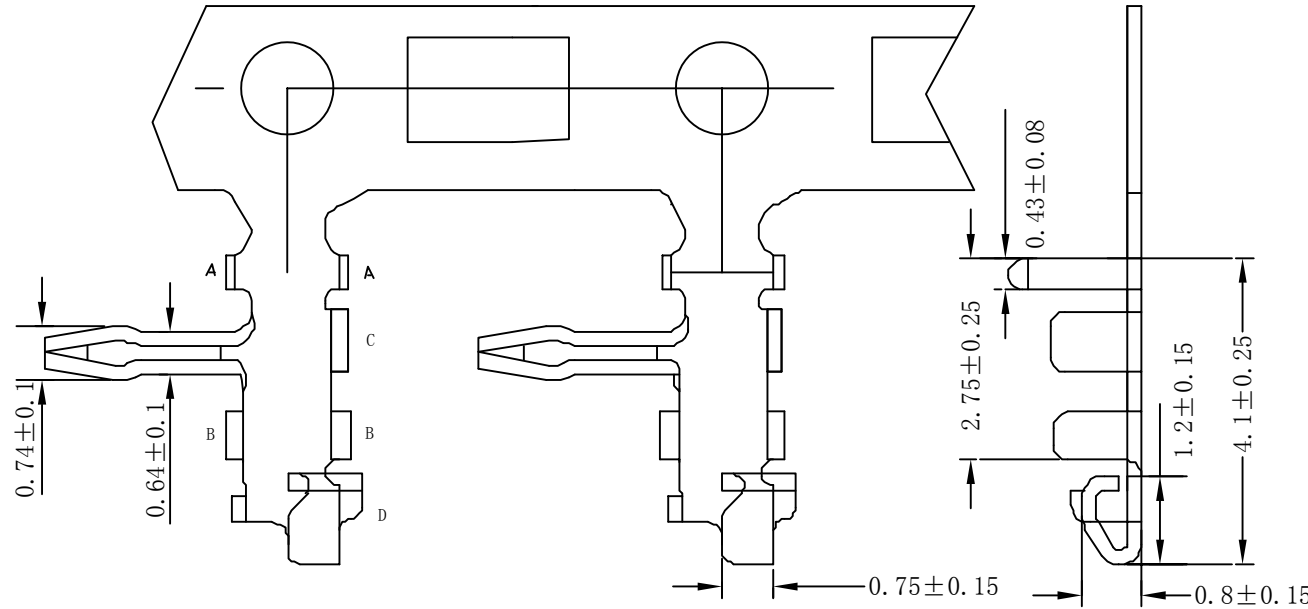


A-----A



C-----C

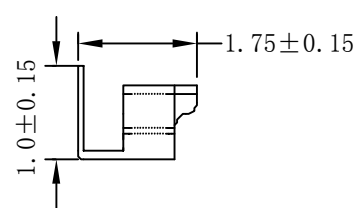

D-----D



B-----B

6

5

4

3

2

1

A

B

C

D

E

F

F

E

D

C

B

A