


5

4

3

2



1

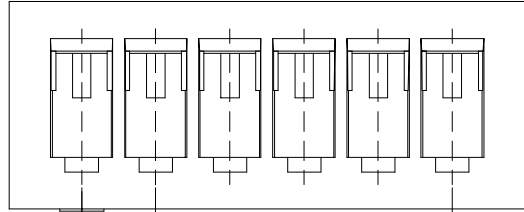

1.00±0.10

A±0.25

B±0.30

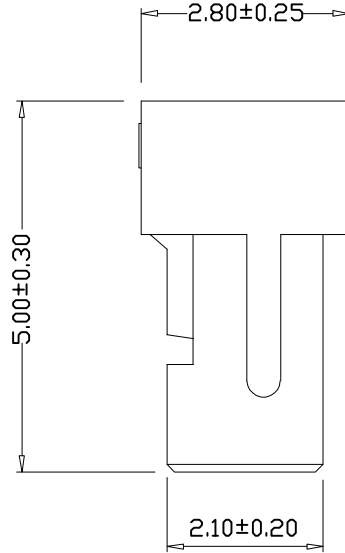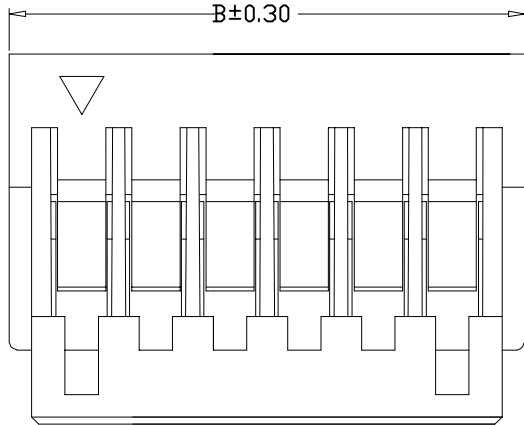


2.80±0.25

5.00±0.30

2.10±0.20

PIN NO.	Dimensions	
	A	B
2P	1.00	3.02
3P	2.00	4.02
4P	3.00	5.02
5P	4.00	6.02
6P	5.00	7.02
7P	6.00	8.02
8P	7.00	9.02
9P	8.00	10.02
10P	9.00	11.02
11P	10.00	12.02
12P	11.00	13.02
15P	14.00	14.02

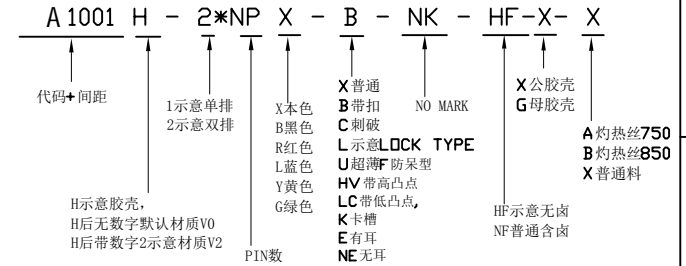


技术说明:
Craft specifications

1. 材质 Material: PA66, UL94V-0.
2. 额定电流 Current rating: 1.0A AC, DC
3. 额定电压 Voltage rating: 50V AC, DC
4. 温度范围 Temperature range: -25°C to 85°C
5. 接触电阻 Contact resistance: ≤30 mΩ
6. 绝缘电阻 Insulation resistance: ≥500 MΩ

东莞市平达电子科技有限公司

				料号PART NO: A1001H-1*NPX-NE				一般公差 GENERAL TOLERANCE	
				品名 TITLE: SH1.0-HC无耳单排)				X.X ±0.30	
				材料:		单位: MM		X.XX ±0.20	
				日期版次 REVISION		日期 DATE		ANGLE ±1°	
				变更内容 DESCRIPTION		核 准 APPROVALBY		比例: 1:1	
				制图:		审核:		日期: 2021.07.08	
				日期版次 REVISION		日期 DATE		日期: 2021.07.08	
				变更内容 DESCRIPTION		核 准 APPROVALBY		日期: 2021.07.08	



6

5

4

3

2

1

HDC