
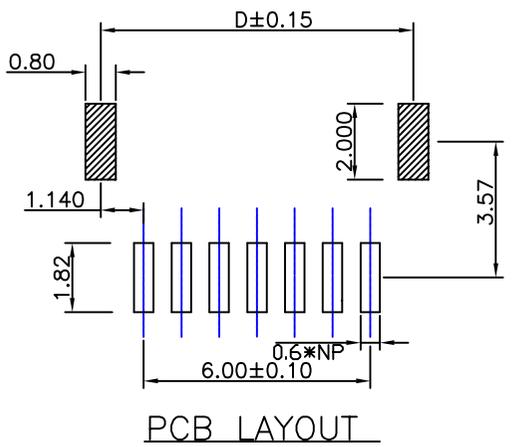
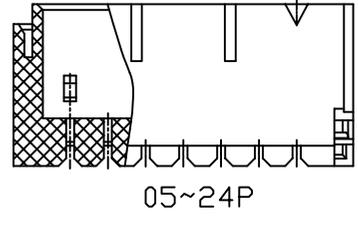



NOTES:
 CURRENT RATING: 1A AC/DC
 VOLTAGE RATING: 100V AC/DC
 TEMPERATURE RANGE: -25°C~+85°C
 CONTACT RESISTANCE: 20mΩ MAX
 INSULATION RESISTANCE:1000MΩ MIN
 WITHSTANDING VOLTAGE:800V AC/MINUTE
 FLASH: 0.05MAX;WARPAGE: 0.08MAX
 10Pin以上有“A”,10Pin以下没有“A”
 PIN:TIN BRASS;
 SHELL:PA9T

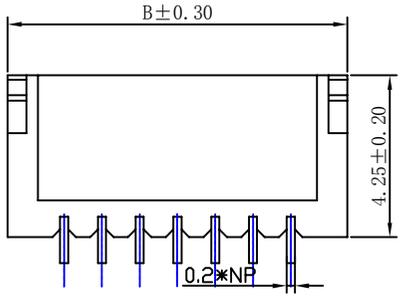

A1001 W RS - 1*NP X - X - 6S - NK-HF

代码 间距 PIN数 X 镀层 X 镀层 HF 无磷
 1 焊盘 2 焊盘 B 镀层 B 镀层 NF 有磷
 R 镀层 U 镀层 NK 和 MARK
 L 镀层 PH 镀层 MK 和 MARK
 Y 镀层 FH 镀层

XG 中轴X 示通孔材料
 1#PPS,2#BT,3#LCP,4#ABS,5#PA6T,
 6#PA66,7#PA9T

G 示PIN镀层,S 示PIN镀层

V 示镀80° 斜角, VS 示
 R 示镀90° 斜角, RS 示

W 示槽宽
 W 示刀痕以槽宽为V0
 W 示槽已示为V2

Circuit No.	Dimensions			
	A	B	C	D
02P	1.00	4.00	2.45	2.25
03P	2.00	5.00	3.45	3.25
04P	3.00	6.00	4.45	4.25
05P	4.00	7.00	5.45	5.25
06P	5.00	8.00	6.45	6.25
07P	6.00	9.00	7.45	7.25
08P	7.00	10.00	8.45	8.25
09P	8.00	11.00	9.45	9.25
10P	9.00	12.00	10.45	10.25
11P	10.00	13.00	11.45	11.25
12P	11.00	14.00	12.45	12.25
13P	12.00	15.00	13.45	13.25
14P	13.00	16.00	14.45	14.25
15P	14.00	17.00	15.45	15.25
16P	15.00	18.00	16.45	16.25
17P	16.00	19.00	17.45	17.25
18P	17.00	20.00	18.45	18.25
19P	18.00	21.00	19.45	19.25
20P	19.00	22.00	20.45	20.25
24P	23.00	26.00	24.45	21.25

东莞市平达电子科技有限公司

料号PART NO: A1001WRS-1*NPX-X-6S				一般公差 GENERAL TOLERANCE	
品名 TITLE: SH1.0-Wafer 贴片式				X.X ±0.15	X.XX ±0.10 X.XX ±0.05 ANGLE ±1°
材料: PIN(Brass) Shell(PA9T)		单位: MM	包装规格: 1K/卷	比例: 1:1	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:
				日期: 2022/7/8	

Notes:
 1.毛刺 不超过0.08mm(max.),外缘毛刺不超过0.25MM
 2.DIM. B公差-->02P~05P±0.10
 06P~10P±0.15
 11P~20P±0.25