






5

4

3

2


1

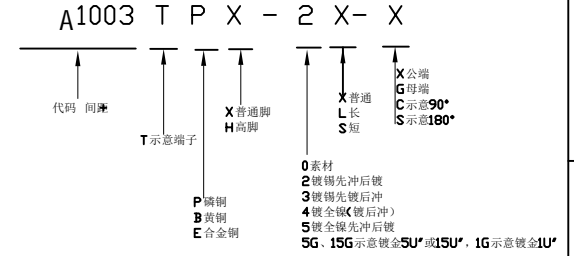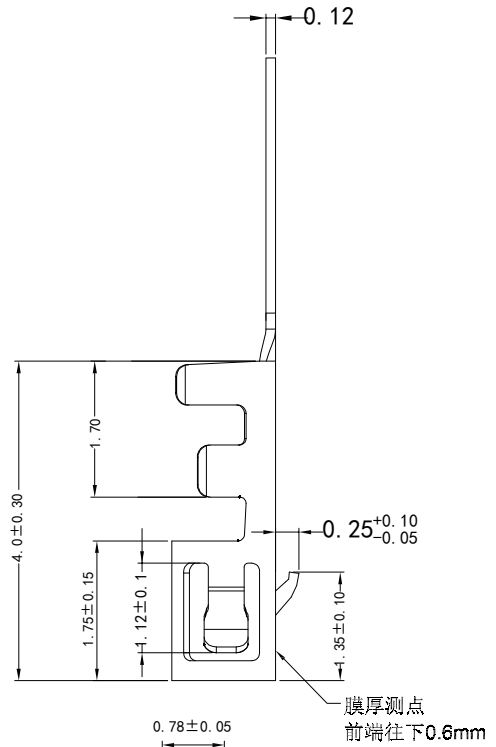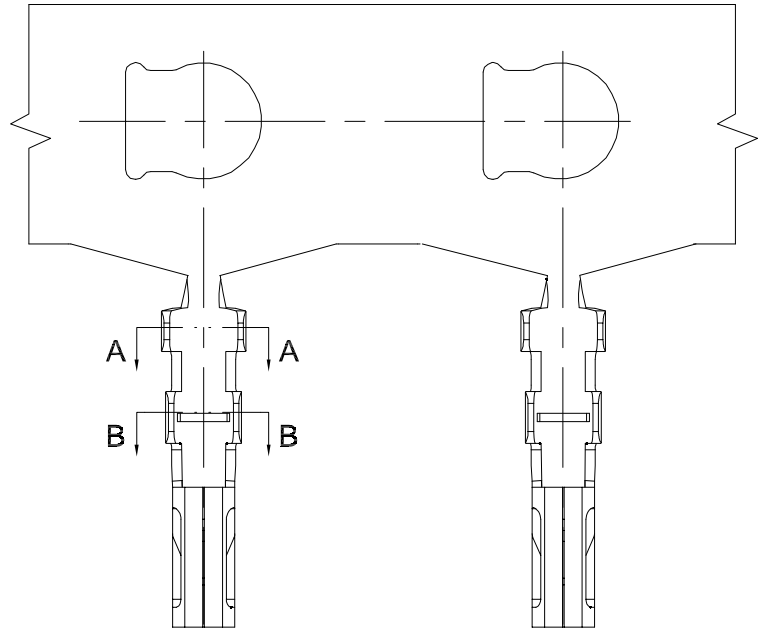

- SPECIFICATIONS**
- Voltage rating: 50V AC/DC;
 - Current rating: 1A AC/DC;
 - Withstanding Voltage: 250V AC/minute
 - Insulation resistance: 100MΩ Min
 - Temperature range: -40°C ~ +85°C
 - Contact resistance: 20mΩ Max
 - Material: C5191
 - Wire Range: #28~#32
 - Insulation O. D.: 0.8mm (Max)

东莞市平达电子科技有限公司

| | | | | | | | | | |
|--|--|--|--|--------------------------|--|--------------------|--|---------------------------|--|
| | | | | 料号PART NO: A1003TPX-2X-G | | | | 一般公差 GENERAL TOLERANCE | |
| | | | | 品名 TITLE: 1003-T | | | | X.X ±0.25 | |
| | | | | 材料: | | 单位: MM | | X.XX ±0.20 | |
| | | | | 日期版次 REVISION | | 日期 DATE | | ANGLE ±1° | |
| | | | | 变更内容 DESCRIPTION | | 核 准 APPROVAL BY | | 比例: 1:1 | |
| | | | | 日期版次 REVISION | | 日期 DATE | | 日期: 2022. 3. 18 | |
| | | | | 变更内容 DESCRIPTION | | 核 准 APPROVAL BY | | 日期: 2022. 3. 18 | |
| | | | | 变更内容 DESCRIPTION | | 核 准 APPROVAL BY | | 日期: 2022. 3. 18 | |
| | | | | 变更内容 DESCRIPTION | | 核 准 APPROVAL BY | | 日期: 2022. 3. 18 | |



SL

6

5

4

3

2

1