







5

4

3

2

1

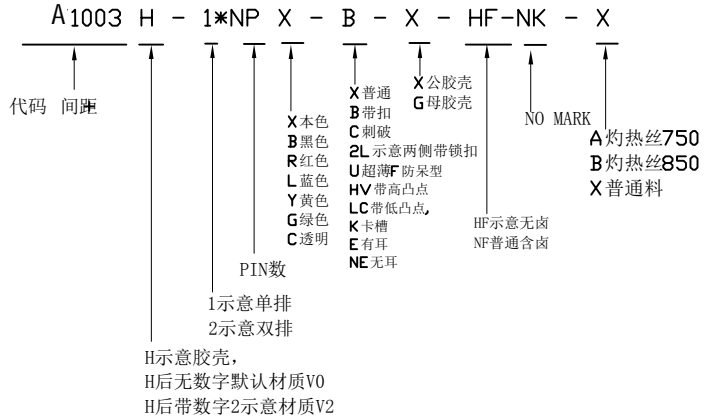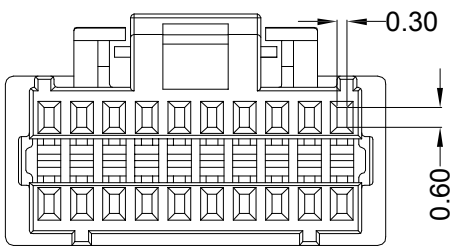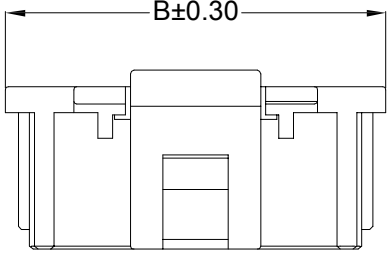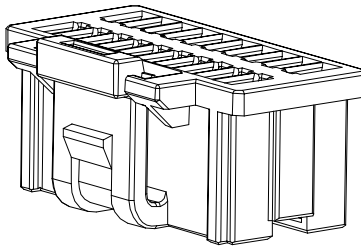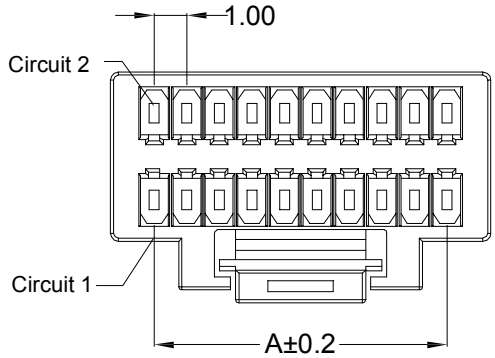

| Poles | Dimensions (mm) |       |
|-------|-----------------|-------|
|       | A               | B     |
| 2x10  | 9.00            | 11.70 |
| 2x12  | 11.00           | 13.70 |
| 2x15  | 14.00           | 16.70 |
| 2x20  | 19.00           | 21.70 |
| 2x25  | 24.00           | 26.70 |

- SPECIFICATIONS**
- Voltage rating: 50V AC/DC;
  - Current rating: 1A AC/DC;
  - Withstanding Voltage: 250V AC/minute
  - Insulation resistance: 100MΩ Min
  - Temperature range: -40°C ~ +85°C
  - Contact resistance: 20mΩ Max
  - Material: PA66
  - Wire Range: #28 ~ #32
  - Insulation O. D. : 0.8mm (Max)

## 东莞市平达电子科技有限公司

|                  |            |                     |                   |                             |        |                           |            |
|------------------|------------|---------------------|-------------------|-----------------------------|--------|---------------------------|------------|
|                  |            |                     |                   | 料号PART NO: A1003H-1*NPX-B-X |        | 一般公差<br>GENERAL TOLERANCE |            |
|                  |            |                     |                   | 品名 TITLE: 1003-H带扣          |        | X.X ±0.30                 |            |
|                  |            |                     |                   | 材料:                         | 单位: MM | 包装规格:                     | X.XX ±0.25 |
|                  |            |                     |                   | 制图:                         | 审核:    | 比例: 1:1                   | ANGLE ±1°  |
| 日期版次<br>REVISION | 日期<br>DATE | 变更内容<br>DESCRIPTION | 核 准<br>APPROVALBY | 制图:                         | 审核:    | 日期:<br>2022. 3. 17        |            |

6

5

4

3

2

1

SL