



P NO.	Dimensions	
	A	B
2P	1.25	4.25
3P	2.50	5.50
4P	3.75	6.75
5P	5.00	8.00
6P	6.25	9.25
7P	7.50	10.50
8P	8.75	11.75
9P	10.00	13.00
10P	11.25	14.25
11P	12.50	15.50
12P	13.75	16.75
13P	15.00	18.00
14P	16.25	19.25
15P	17.50	20.50
16P	18.75	21.75

- 1、Applicable Wire Range: AWC#28~#32
- 2、Insulation O.D.: 0.80mm (Max.)
- 3、Current Rating: 2A AC,DC
- 4、Voltage Rating: 125V AC,DC
- 5、Temperature Rang: -25°C~+85°C
- 6、Contact Resistance: 20mΩ Max
- 7、Insulation Resistance: 100MΩ Min
- 8、Withstanding Voltage: 500V AC/minute

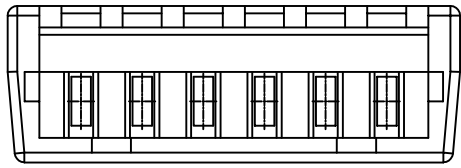

A1250 H - 1*NP X - B - NK - HF-X

代码+间距
H示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2
PIN数
1示意单排, 2示意双排
X本色, B黑色, R红色, L蓝色, Y黄色, G绿色
X普通, B带扣, C刺破, L示意 LOCK TYPE, U超薄
NO MARK
HF示意无卤, NF普通含卤
X公胶壳, G母胶壳

东莞市平达电子科技有限公司

料号PART NO: A1250H-1*NPX-X				一般公差 GENERAL TOLERANCE	
品名 TITLE: MX1.25-H				X.X ±0.30	
材料: PA66 94-V0	单位: MM	包装规格: 1K/包	比例: 1:1	X.XX ±0.25	
制图:	审核:	核准:	日期: 2020/04/22	X.XXX ±0.15	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	ANGLE ±5°	

6

5

4

3

2

1