



5

4





3

2

1

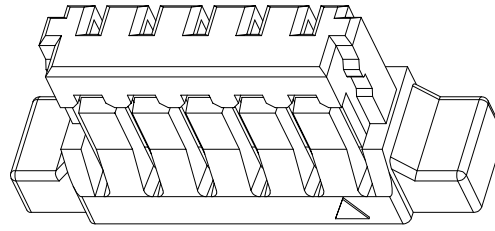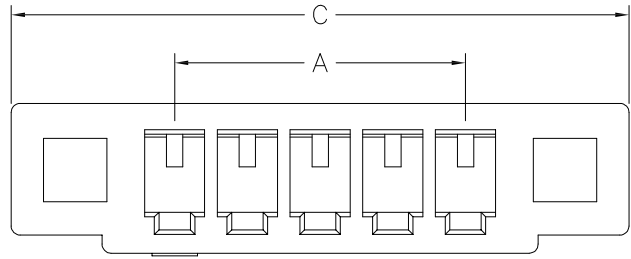

| Poles | Dimensions | | |
|-------|------------|-------|-------|
| | A | B | C |
| 02P | 0.80 | 1.80 | 4.40 |
| 03P | 1.60 | 2.60 | 5.20 |
| 04P | 2.40 | 3.40 | 6.00 |
| 05P | 3.20 | 4.20 | 6.80 |
| 06P | 4.00 | 5.00 | 7.60 |
| 07P | 4.80 | 5.80 | 8.40 |
| 08P | 5.60 | 6.60 | 9.20 |
| 09P | 6.40 | 7.40 | 10.00 |
| 10P | 7.20 | 8.20 | 10.80 |
| 11P | 8.00 | 9.00 | 11.60 |
| 12P | 8.80 | 9.80 | 12.40 |
| 13P | 9.60 | 10.60 | 13.20 |
| 14P | 10.40 | 11.40 | 14.00 |
| 15P | 11.20 | 12.20 | 14.80 |
| 16P | 12.00 | 13.00 | 15.60 |
| 17P | 12.80 | 13.80 | 16.40 |
| 18P | 13.60 | 14.60 | 17.20 |
| 19P | 14.40 | 15.40 | 18.00 |
| 20P | 15.20 | 16.20 | 18.80 |

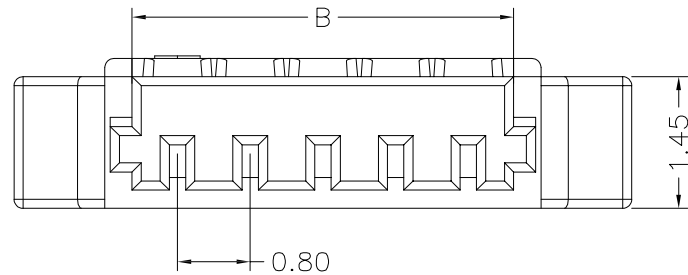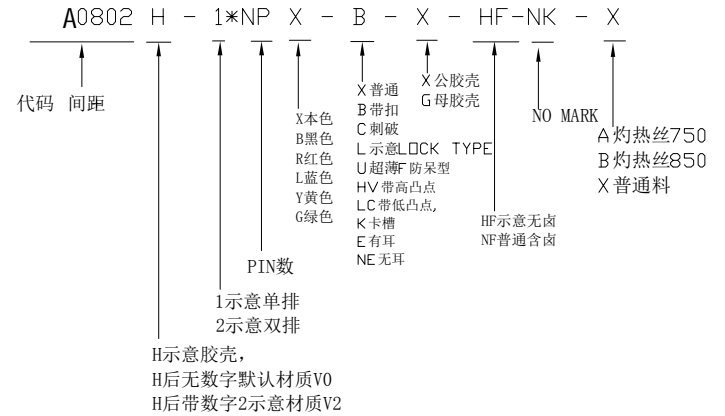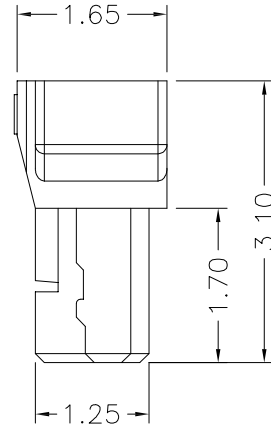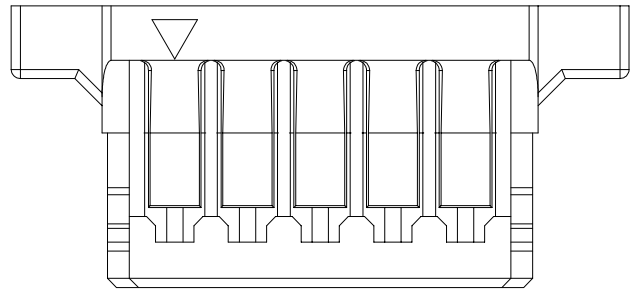

0.80mm Pitch wire to board connectors

■ SPECIFICATIONS

- Voltage rating: 30V AC/DC
- Current rating: 0.5A AC/DC
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

东莞市平达电子科技有限公司


料号PART NO: A0802H-1*NPX-E-X

品名 TITLE: 0.8-H2 (有耳)

材料: 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2021.10.28

| | |
|-------------------|-------|
| 一般公差 | |
| GENERAL TOLERANCE | |
| X.X | ±0.35 |
| X.XX | ±0.20 |
| ANGLE | ±1° |

| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVALBY |
|------------------|------------|---------------------|-------------------|
| | | | |
| | | | |
| | | | |



XDYT

6

5

4

3

2

1