
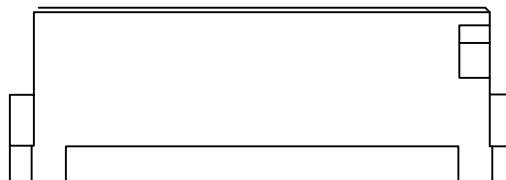
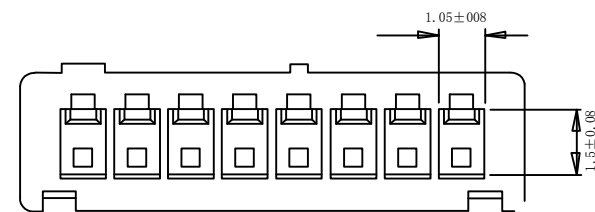


Circuit 1

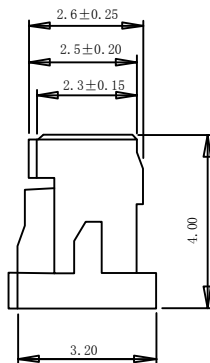

PIN数	A	B	C
02	1.25	4.15	3.05
03	2.50	5.40	4.30
04	3.75	6.65	5.55
05	5.00	7.90	6.80
06	6.25	9.15	8.05
07	7.50	10.40	9.30
08	8.75	11.65	10.55
09	10.00	12.90	11.80
10	11.25	14.15	13.05
11	12.50	15.40	14.30
12	13.75	16.65	15.55
13	15.00	17.90	16.80
14	16.25	19.15	18.00
15	17.50	20.40	19.30

A1252 H - 1\*NP X - B - X - HF-NK - X

代码+间距      PIN数      X公胶壳 G母胶壳      NO MARK      A灼热丝750 B灼热丝850 X普通料

X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

X普通  
B带扣  
C刺破  
U超薄防呆型  
HV带高凸点  
LC带低凸点  
K卡槽  
E有耳  
NE无耳

H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

1示意单排  
2示意双排

HF示意无卤  
NF普通含卤

- NOTES:
- Material: Nylon66, UL94V-0
  - Color:
  - Current Rating: 1A AC, DC
  - Voltage rating: 150V AC, DC
  - Temperature Range: -25° c ~ +85° c
  - Contact Resistance: 30mΩ Min
  - Insulation Resistance: 500MΩ Min
  - Withstanding Voltage: 500V AC/minute
  - APPLICABLE WIRE: AWG#28~#32

## 东莞市平达电子科技有限公司


料号PART NO: A1252H-1\*NPX-X-X品

名 TITLE: DF13-H(单排)

材料:      单位: MM      包装规格:      比例: 1:1

制图:      审核:      核准:      日期: 2021.11.30

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1