

F





E

D

C

B

A

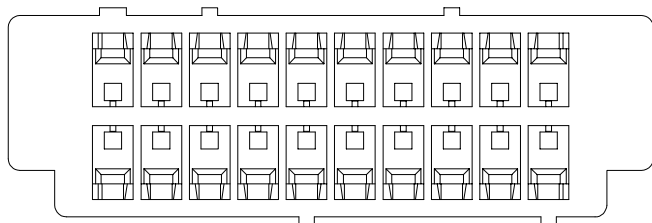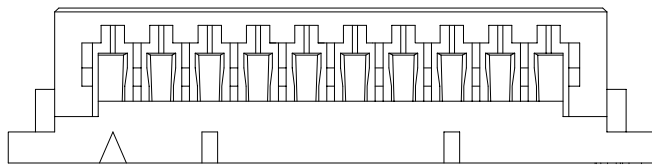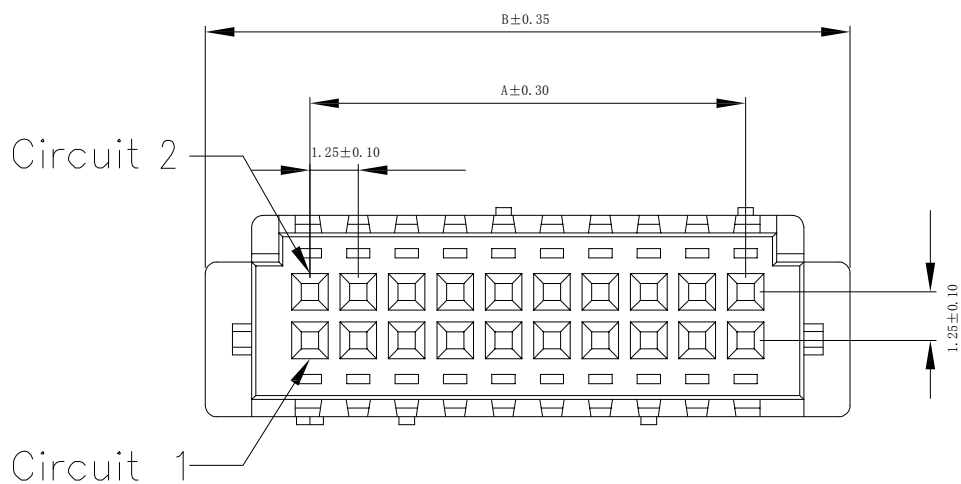

PIN	DIM. (mm)	
	A	B
2x05	5.00	10.40
2x06	6.25	11.65
2x07	7.50	12.90
2x10	11.25	16.65
2x15	17.50	22.90
2x17	20.00	25.40
2x18	21.25	26.65
2x20	23.75	29.15
2x21	25.00	30.40
2x25	30.00	35.40

A1252 H - 1*NP X - B - X - HF-NK - X

代码+间距 PIN数 X公胶壳 G母胶壳 NO MARK A灼热丝750 B灼热丝850 X普通料

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

X普通
B带扣
C刺破
L示意LOCK TYPE
U超薄防呆型
HV带高凸点
LC带低凸点
K卡槽
E有耳
NE无耳

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

1示意单排
2示意双排

HF示意无卤
NF普通含卤

NOTES:

- Material:Nylon66, UL94V-0
- Color:
- Corrent Rotng:1A AC,DC
- Voltage rating:150V AC,DC
- Temperature Rang:-25° c~+85° c
- Contoct Resistance:30mΩ Min
- Insulation Resistance:500MΩ Min
- Withstanding Voltage:500V AC/minute
- APPLICABLE WIRE:AWG#28~#32

东莞市平达电子科技有限公司

料号PART NO: A1252H-2*NPX-X-X

品名 TITLE: DF13-H (双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2021.11.30

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



6

5

4

3

2

1