


Poles	Dimensions		
	A	B	C
02P	0.80	1.80	2.40
03P	1.60	2.60	3.20
04P	2.40	3.40	4.00
05P	3.20	4.20	4.80
06P	4.00	5.00	5.60
07P	4.80	5.80	6.40
08P	5.60	6.60	7.20
09P	6.40	7.40	8.00
10P	7.20	8.20	8.80
11P	8.00	9.00	9.60
12P	8.80	9.80	10.40
13P	9.60	10.60	11.20
14P	10.40	11.40	12.00
15P	11.20	12.20	12.80
16P	12.00	13.00	13.60
17P	12.80	13.80	14.40
18P	13.60	14.60	15.20
19P	14.40	15.40	16.00
20P	15.20	16.20	16.80

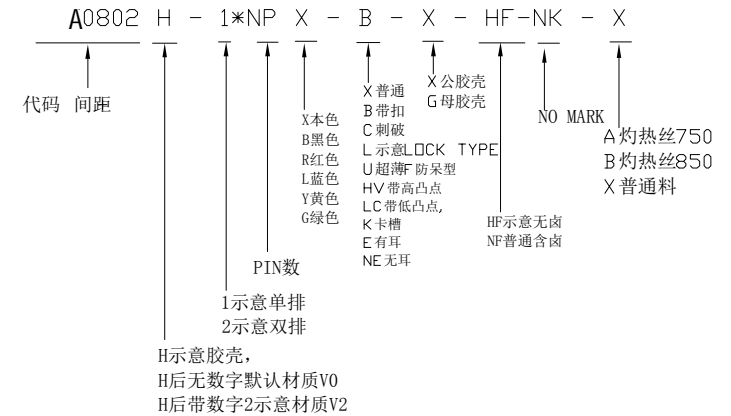

0.80mm Pitch wire to board connectors

■ SPECIFICATIONS

- Voltage rating: 30V AC/DC
- Current rating: 0.5A AC/DC
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

东莞市平达电子科技有限公司


料号PART NO: A0802H-1*NPX-NE-X

品名 TITLE: 0.8-H2(无耳)

材料: 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2021.10.28

一般公差
GENERAL TOLERANCE
 X.X ±0.35
 X.XX ±0.20
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



XDYT