
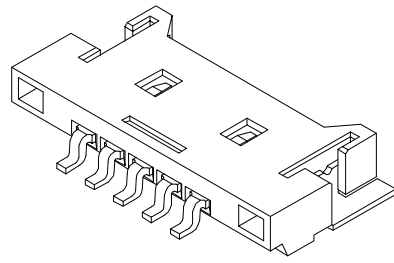


P.C.B. LAYOUT

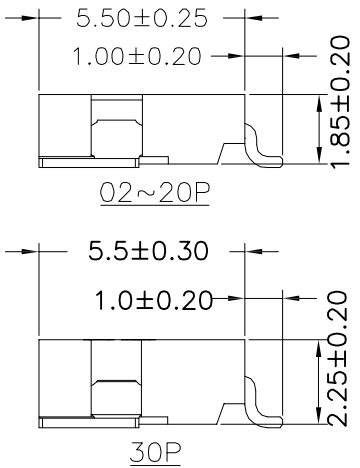

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
02P	1.25	7.65	7.77
03P	2.50	8.90	9.02
04P	3.75	10.15	10.27
05P	5.00	11.40	11.52
06P	6.25	12.65	12.77
07P	7.50	13.90	14.02
08P	8.75	15.15	15.27
09P	10.00	16.40	16.52
10P	11.25	17.65	17.77
11P	12.50	18.90	19.02
12P	13.75	20.15	20.27
14P	16.25	22.65	22.77
15P	17.50	23.90	24.02
16P	18.75	25.15	25.27
20P	23.75	30.15	30.27
30P	36.25	42.65	42.77

A1255 W RS - 1\*NPX - X - XG - NK-HF

代码+间距      PIN数  
1单排  
2双排

X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色

X普通  
B带扣  
U超薄  
PH组合排针  
FH组合排母

XG中的X示意尼龙料,  
1为PPS, 2为PBT, 3为LCP,  
4为ABS, 5为PA6T,  
6为PA66

NK为NO MARK  
MK为有MARK

HP无卤  
NF普通含卤

V示意180°直针, VS立式  
R示意90°弯针, RS卧式

W示意针座  
W后无0默认材质为V0  
W后带2示意V2

G示意PIN针镀金,  
S为PIN针镀锡

SPECIFICATIONS  
 Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Gold-plated  
 Solder Tabs: Brass/Gold-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

东莞市平达电子科技有限公司

				料号PART NO: A1255WRS-1*NPX-X			一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
				品名 TITLE: 超薄MX1.25-WAFER(卧贴)			
日期版次 REVISION		日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	材料:	单位: MM	包装规格:
					制图:	审核:	比例: 1:1
							日期: 2022.4.16

