
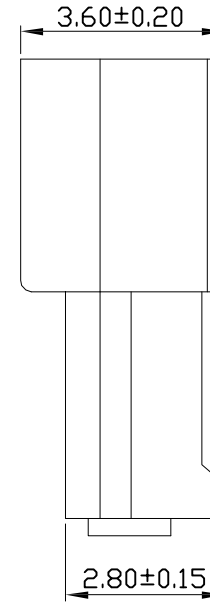



孔位 poles	A	B
2	1.50	5.55
3	3.00	7.05
4	4.50	8.55
5	6.00	10.05
6	7.50	11.55
7	9.00	13.05
8	10.50	14.55
9	12.00	16.05
10	13.50	17.55
11	15.00	19.05
12	16.50	20.55

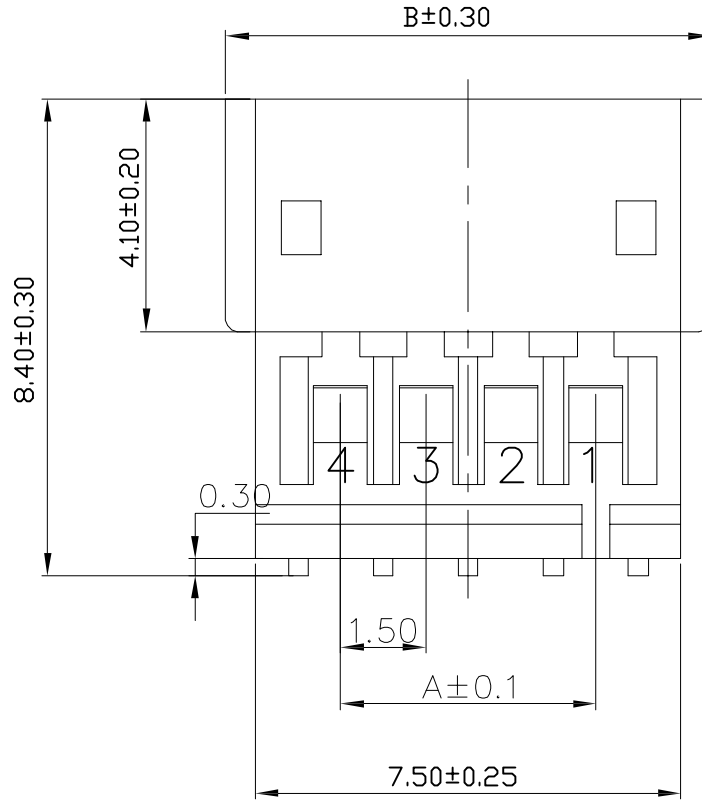


- Current rating: 1A AC\DC (AWG #26)
- Voltage rating: 50V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20qmax
Electrical properties
- Insulation resistance: 100MΩmin
- Withstanding voltage: 500V AC/ minute
- Applicable wire: AWG #30 to #26

Environmental controls

- Banned contains SS - 00259 are restricted substances.
- The corresponding issued by SGS or ITS icp-aes data, Not the material in a list, and validity.

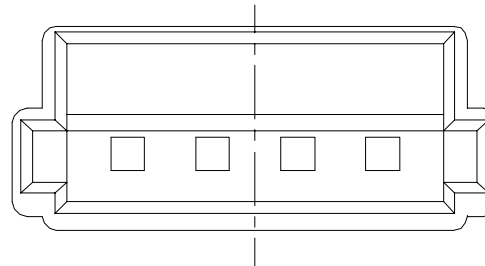

1501 H - 1*NP X - B - X - HF-NK - X

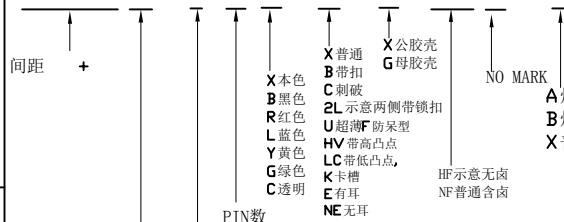

东莞市平达电子科技有限公司


料号PART NO: 1501H-1*NPX-X-X

品名 TITLE: ZH1.5-H(母)

材料: 单位: MM 包装规格: 比例: 1:1

日期版次 REVISION 日期 DATE 变更内容 DESCRIPTION 核 准 APPROVALBY 制图: 审核: 核准: 日期: 2022. 4. 18

一般公差 GENERAL TOLERANCE	
X.X	±0.30
X.XX	±0.25
ANGLE	±1°



6

5

4

3

2

1