






电镀后的收料方向
(开口向内)



SPECTION

- Current rating: 2A AC, DC (AWG #24)
- Voltage rating: 100V AC, DC
- Temperature range: -25°C to +85°C (including temperature rise in
- Contact resistance: Initial value/30mΩ max.After environmental testing /60mΩ max.
- Insulation resistance: 500M Ω min.
- Withstanding voltage: 500V AC/minute
- Applicable wire: Conductor size/AWG #28 to #24
- Insulation O. D. /0.8 to 1.2mm

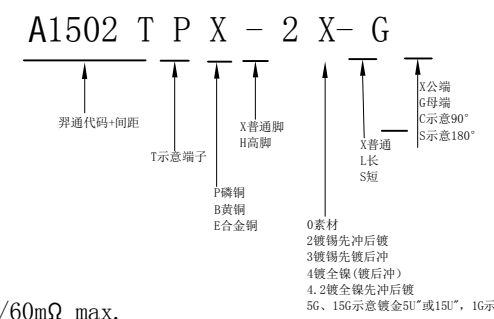

东莞市平达电子科技有限公司

料号PART NO: A1502TPX-2X-G		一般公差 GENERAL TOLERANCE	
品名 TITLE: 1502-T		X. X ±0.30	
材料: C5191	单位: MM	包装规格:	X. XX ±0.25
日期版次 REVISION	日期 DATE	比例: 1:1	ANGLE ±1°
变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	日期: 2021.12.08
		审核:	
		核准:	

