

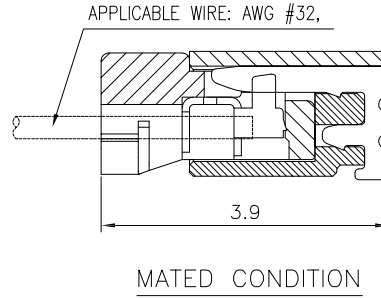

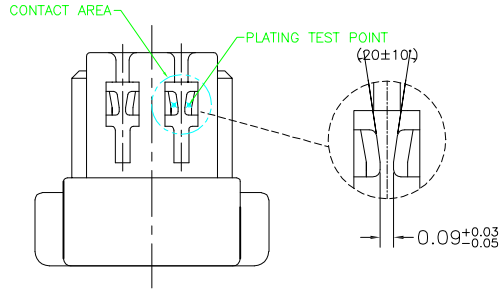
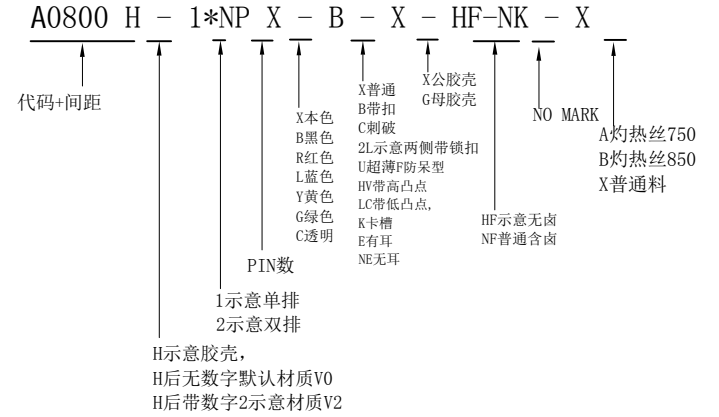



5 4 3 2 1

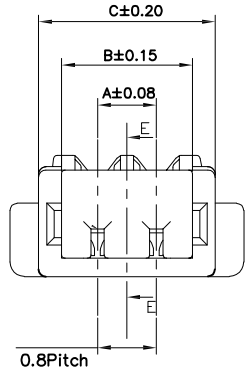


NOTE:
1.MATERIAL:
Housing: ThermalPlastic (UL94V-0)
Terminal: Copper Alloy
Color: Natural
2.SPECIFICATION:
Current Rating: 0.5A AC,DC (AWG#32)
Voltage Rating: 30V (AC,DC)
Contact Resistance: Initial: 30mΩ max
After environmental: 40mΩmax
Insulator Resistance:Initial: 100MΩ min
After environmental:100MΩ min
Withstanding Voltage:200v AC for 1 minute
Temperature Range: -25°C~85°C
Applicable Wire: AWG #32
Insulation O.D.: φ0.38±0.02mm

EST0800H-1*NPX-E



EST0800H-1*NPX-NE



CKT	DIM A	DIM B	DIM C
2	0.80	1.78	2.40
3	1.60	2.58	3.20
4	2.40	3.38	4.00
5	3.20	4.18	4.80
6	4.00	4.98	5.60
7	4.80	5.78	6.40
8	5.60	6.58	7.20
9	6.40	7.38	8.00
10	7.20	8.18	8.80
11	8.00	8.98	9.60
12	8.80	9.78	10.40
13	9.60	10.58	11.20
14	10.40	11.38	12.00
15	11.20	12.18	12.80
16	12.00	12.98	13.60
17	12.80	13.78	14.40
18	13.60	14.58	15.20
19	14.40	15.38	16.00
20	15.20	16.18	16.80
21	16.00	16.98	17.60
22	16.80	17.78	18.40
23	17.60	18.58	19.20
24	18.40	19.38	20.00

东莞市平达电子科技有限公司

料号PART NO: A0800H-1*NPX-E				一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
品名 TITLE: 0.8刺破线端 (有耳)				
材料:	单位: MM	包装规格:	比例: 1:1	
制图:	审核:	核准:	日期: 2022. 4. 20	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	

6 5 4 3 2 1 XES