




SECTION A-A
SCALE:1:1



SECTION B-B
SCALE:1:1



SECTION C-C
SCALE:1:1

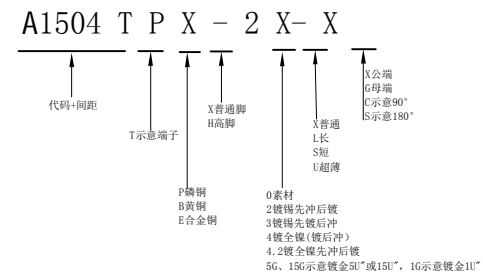

■ SPECIFICATIONS

- Voltage rating: 100V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -40°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: C5191
- After environmental testing: 40 mΩ Max
- Wire range: #24~#28
- Insulation O. D.: 1.28mm Max

东莞市平达电子科技有限公司

				料号PART NO: A1504TPX-2X-G				一般公差 GENERAL TOLERANCE	
				品名 TITLE: 1504-T				X.X ±0.25	
				材料:		单位: MM		X.XX ±0.20	
				制图:		审核:		ANGLE ±1°	
日期版次 REVISION				日期 DATE		变更内容 DESCRIPTION		核 准 APPROVALBY	
						制图:		日期: 2022.4.20	
						审核:		核 准:	
						包装规格:		比例: 1:1	
						核准:		日期: 2022.4.20	



SL