




2\*06P-2\*15P Shape  
Sale:1:1

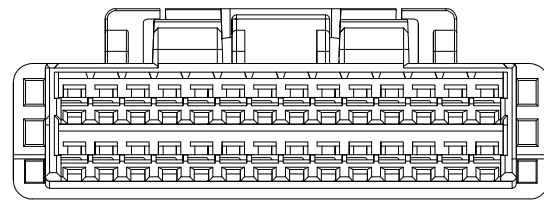

2\*02P-2\*03P Shape  
Sale:1:0.7



2\*04P-2\*05P Shape  
Sale:1:0.7

A1504 H - 1\*NP X - B - X - HF-NK - X

代码+间距      PIN数      X普通      X公胶壳  
B带扣      B黑色      G母胶壳  
C刺破      R红色      L蓝色      Y黄色      G绿色      C透明  
2L示意两侧带锁扣      U超薄F防呆型      HV带高凸点      LC带低凸点      K卡槽      E有耳      NE无耳  
NO MARK      HF示意无齿      NP普通含齿  
A灼热丝750      B灼热丝850      X普通料

H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	1.50	7.30	4.25	2*09	12.00	17.80	14.75
2*03	3.00	8.80	5.75	2*10	13.50	19.30	16.25
2*04	4.50	10.30	7.25	2*11	15.00	20.80	17.75
2*05	6.00	11.80	8.75	2*12	16.50	22.30	19.25
2*06	7.50	13.30	10.25	2*13	18.00	23.80	20.75
2*07	9.00	14.80	11.75	2*14	19.50	25.30	22.25
2*08	10.50	16.30	13.25	2*15	21.00	26.80	23.75

■ SPECIFICATIONS

- Voltage rating: 100V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -40°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: PBT
- After environmental testing: 40 mΩ Max
- Wire range: #24~#28
- Insulation O. D.: 1.28mm Max

东莞市平达电子科技有限公司

料号PART NO: A1504H-1\*NPX-B-X

品名 TITLE: 1504-H

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022. 4. 20

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

