

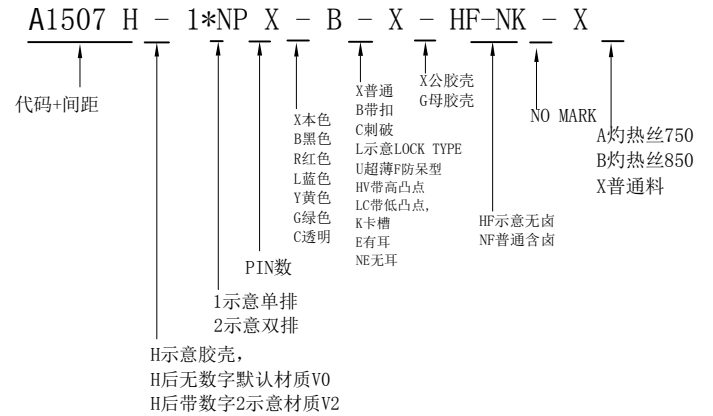
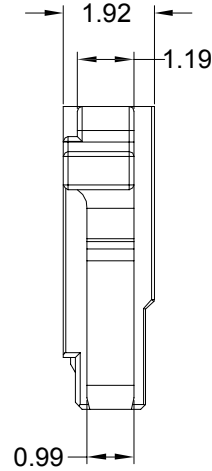


1507-H	PA66 UL 94V-0	1507-T	1507
PART NO	Material	Suitable EST Terminal	Mates With P D Wafer

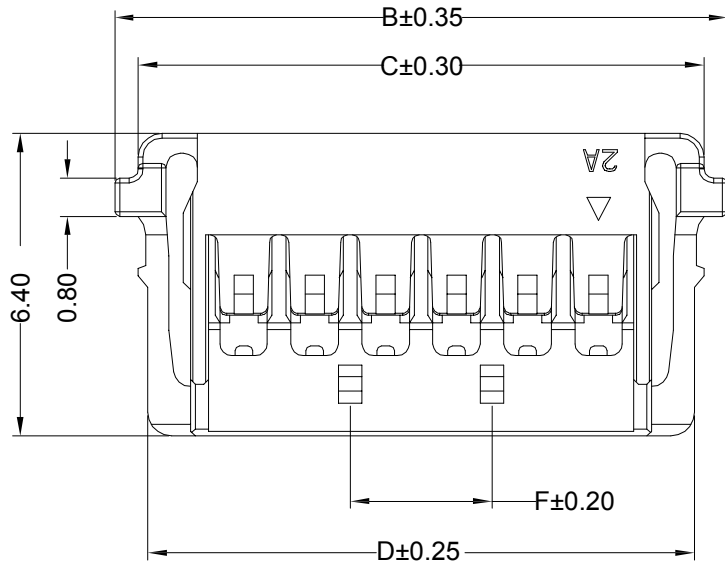

■ Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤40mΩ

Poles	Dimensions(mm)				
	A	B	C	D	F
02		6.95	5.95	5.55	
03	3.00	8.45	7.45	7.05	
04	4.50	9.95	8.95	8.55	
05	6.00	11.45	10.45	10.05	3.00
06	7.50	12.95	11.95	11.55	3.00
07	9.00	14.45	13.45	13.05	4.50
08	10.50	15.95	14.95	14.55	6.00
09	12.00	17.45	16.45	16.05	7.50
10	13.50	18.95	17.95	17.55	9.00
11	15.00	20.45	19.45	19.05	10.50
12	16.50	21.95	20.95	20.55	12.00



东莞市平达电子科技有限公司

				料号PART NO: A1507H-1*NPX-X		一般公差 GENERAL TOLERANCE	
				品名 TITLE: 1507-H		X.X ±0.30	
				材料:		X.XX ±0.20	
				单位: MM		ANGLE ±1°	
				包装规格:		比例: 1:1	
				审核:		日期: 2021.12.08	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期:

