

5 4 3 2 1

F

F

E

E

D

D

C




C

B


B

A


A

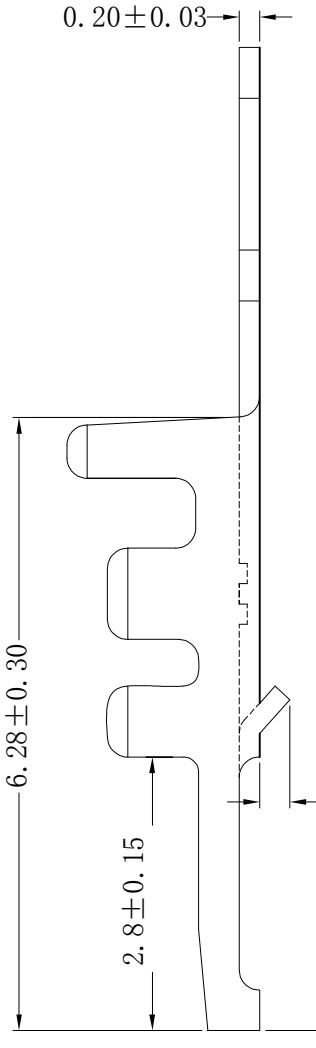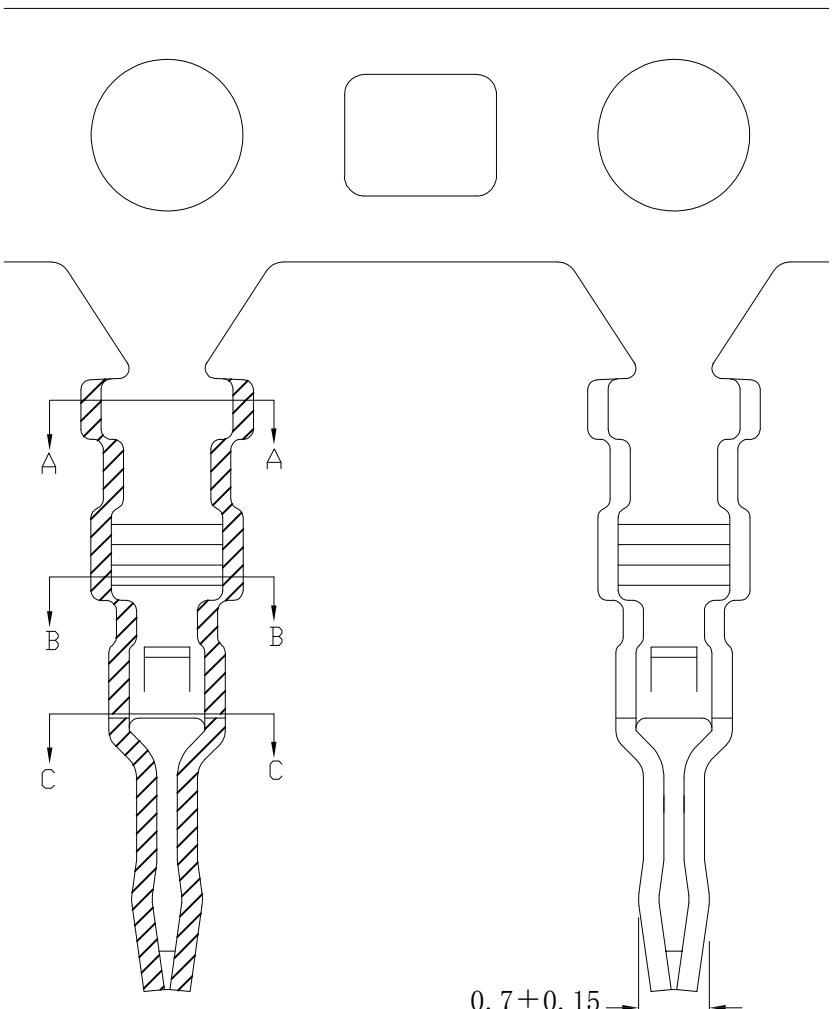

SEC:A--A

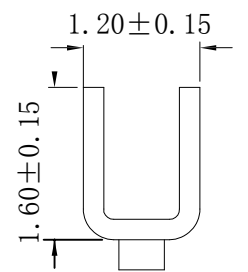

SEC:C--C



A1500 T B X - 2 X - X

代码+间距 T示意端子 P磷铜 0素材
 X普通脚 B黄铜 2镀锡先冲后镀
 H高脚 E合金铜 3镀锡先镀后冲
 X普通 5G、15G示意镀金5U"或15U", 1G镀金1U"
 L长 S短 X公
 G母 C示意90°
 S示意180°

PRODUCT SPECIFICATON

1. SURFACE TREATEMENT: Tin plated brass terminal
2. Temperature range: -25°C ~ 85°C
3. Current rating: 0.7A AC/DC
4. Contact resistance: 20mΩ MAX
5. Insulation resistance: 1000MΩ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: #24~28

东莞市平达电子科技有限公司

				料号PART NO: EST1500TBX-2X-S			一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 ANGLE ±1°
				品名 TITLE: SZN1.5-T (180°)			
材料: C2680		单位: MM	包装规格:	比例: 1:1			
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期:

6 5 4 3 2 1